

Report No.: 93.11313 LENS Pendant Light    Test Time: 2023-06-09 18:47


## Luminaire Property

Luminaire Category: Bridgelux V10B 3000K,CRI90  
Luminaire Description: 80D  
Current: 0.096 A  
Power Factor: 0.950  
Voltage: 221.9 V  
Power: 20.20 W


## Photometric Results

CIE Class: Direct  
Measurement Flux: 1009.9 lm  
Downward Ratio: 100%  
Horizontal Diffuse Angle(50%): H60.7  
Vertical Diffuse Angle(50%): V60.7  
Luminaire Efficacy Rating (LER): 50  
Max. Intensity: 1117.68 cd  
Total Rated Lamp Lumens: 1009.9 lm  
Efficiency: 100%  
Upward Ratio: 0%  
Central Intensity: 1117.67 cd  
Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve


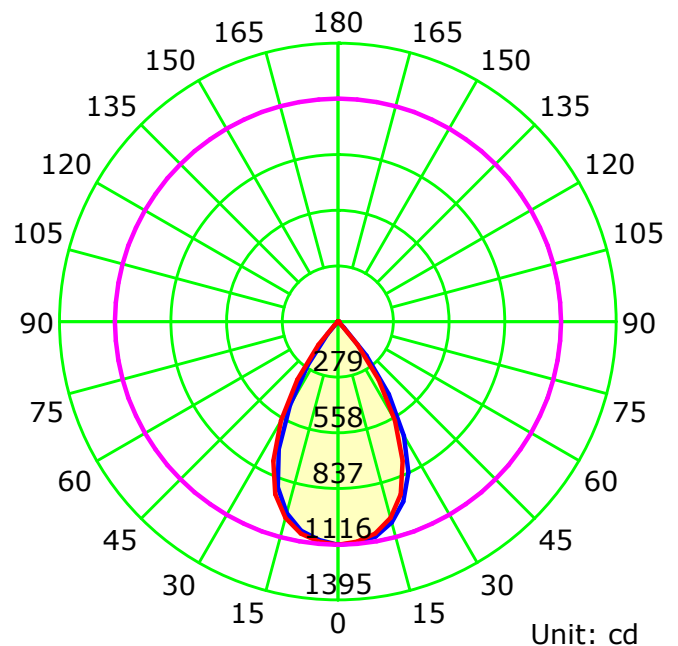


— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:


## Luminous Intensity Distribution Curve

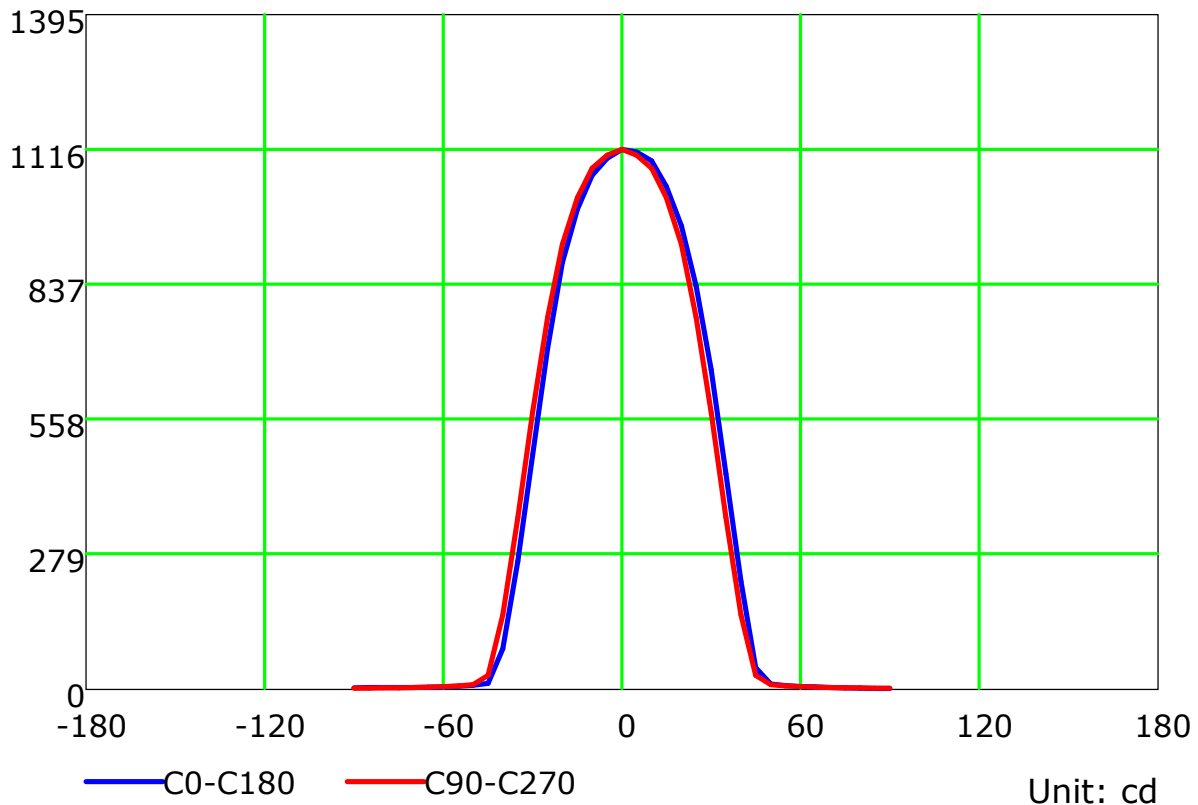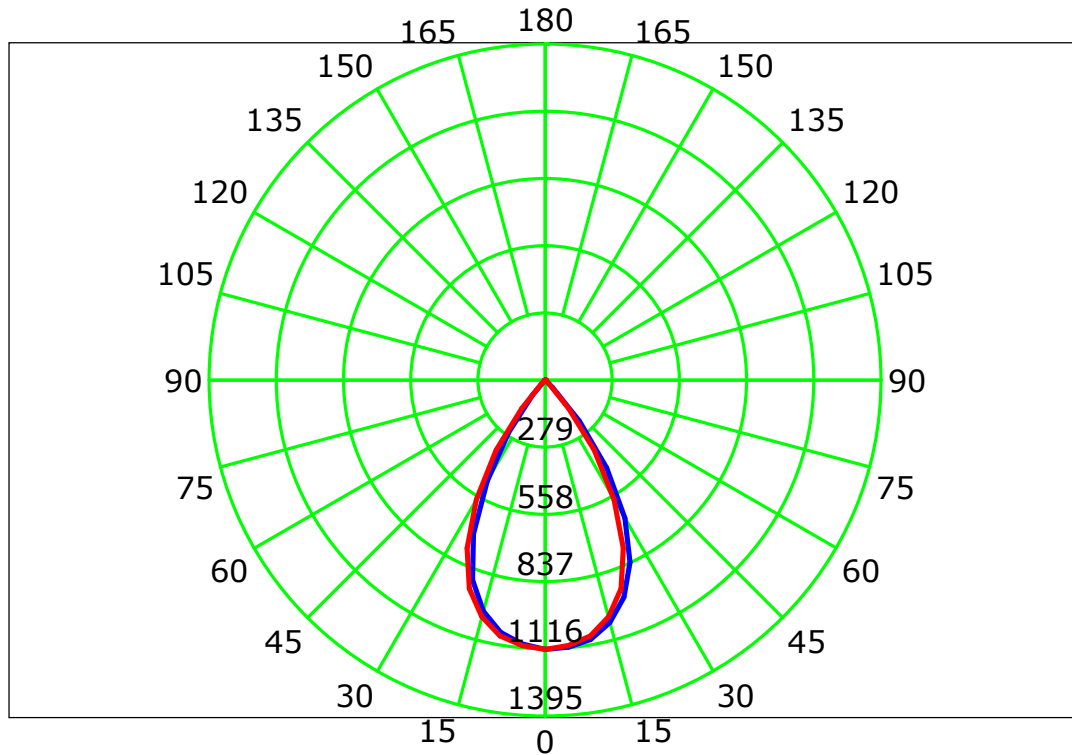

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

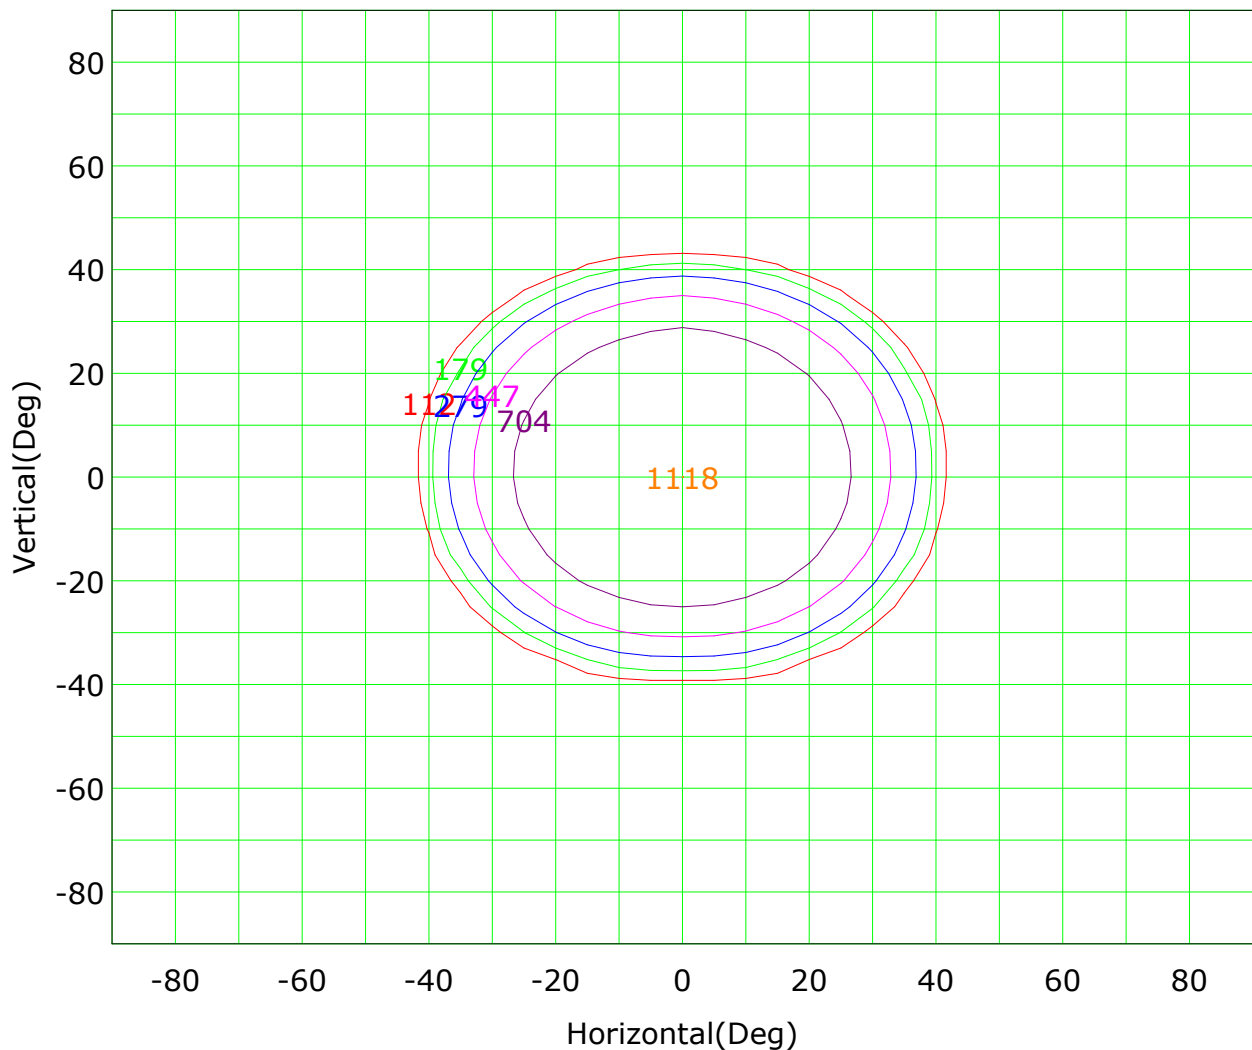

Imax (100%): 1118 cd

( 10%): 112 cd	( 16%): 179 cd
( 25%): 279 cd	( 40%): 447 cd
( 63%): 704 cd	(100%): 1118 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

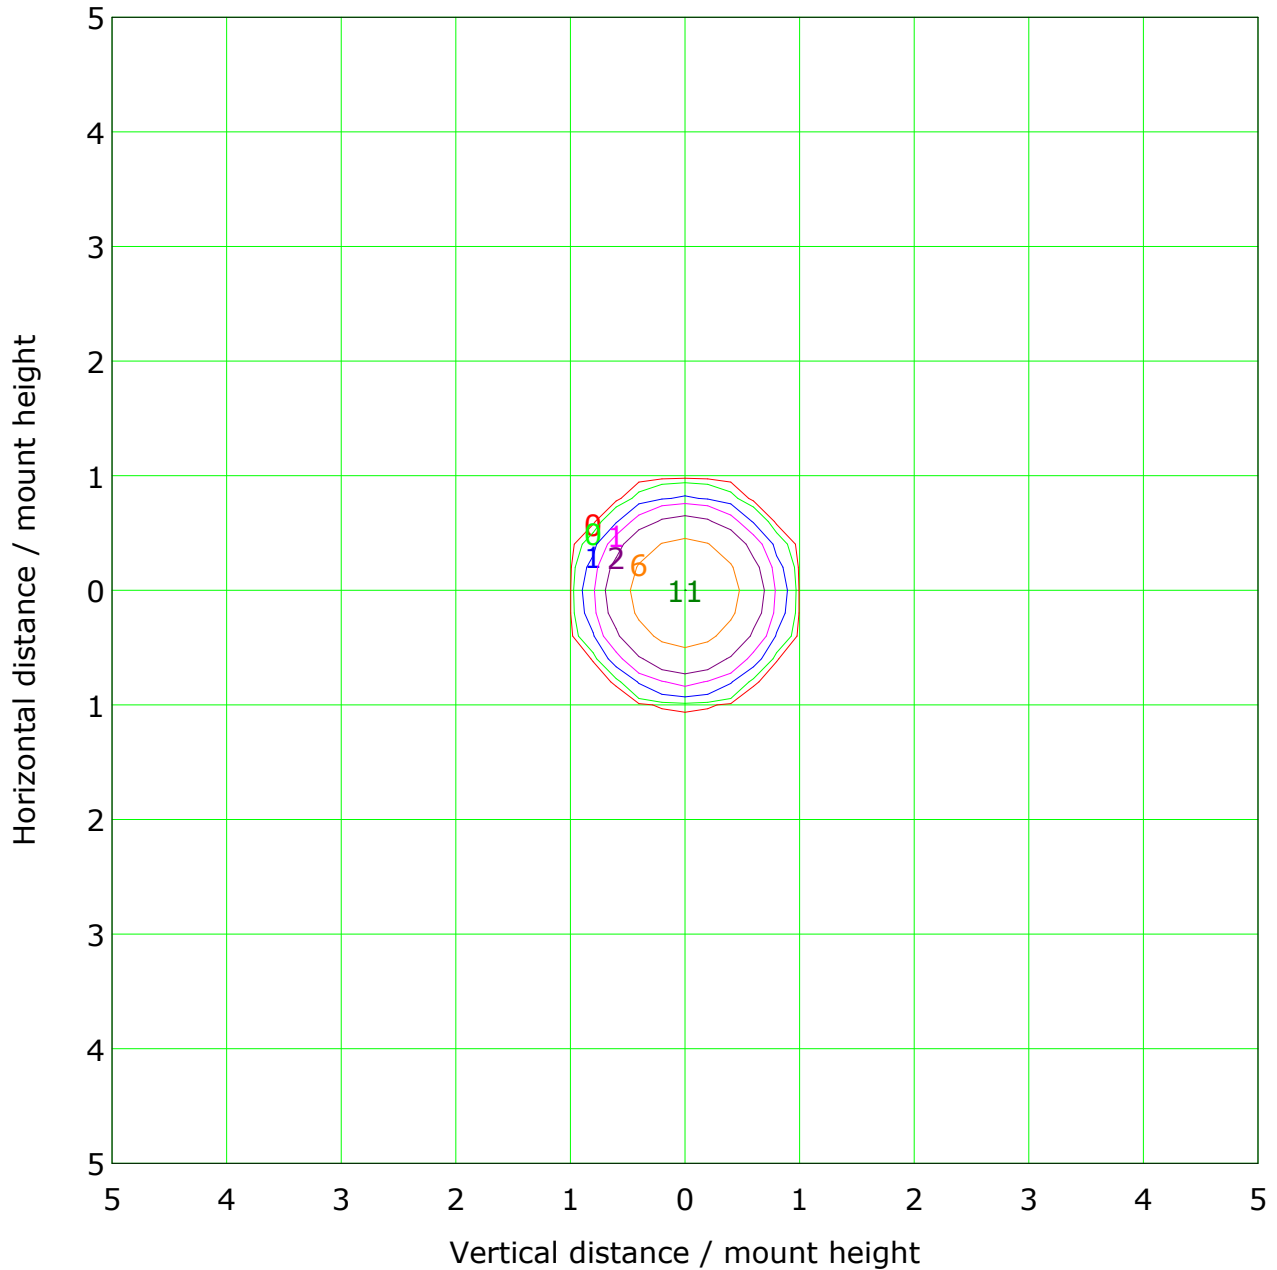

Mounting Height: 10m    Max Lux(100%): 11 lx			
— ( 1%):	0 lx	— ( 2%):	0 lx
— ( 5%):	1 lx	— ( 10%):	1 lx
— ( 20%):	2 lx	— ( 50%):	6 lx
— (100%):	11 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

## Illuminance at a Distance

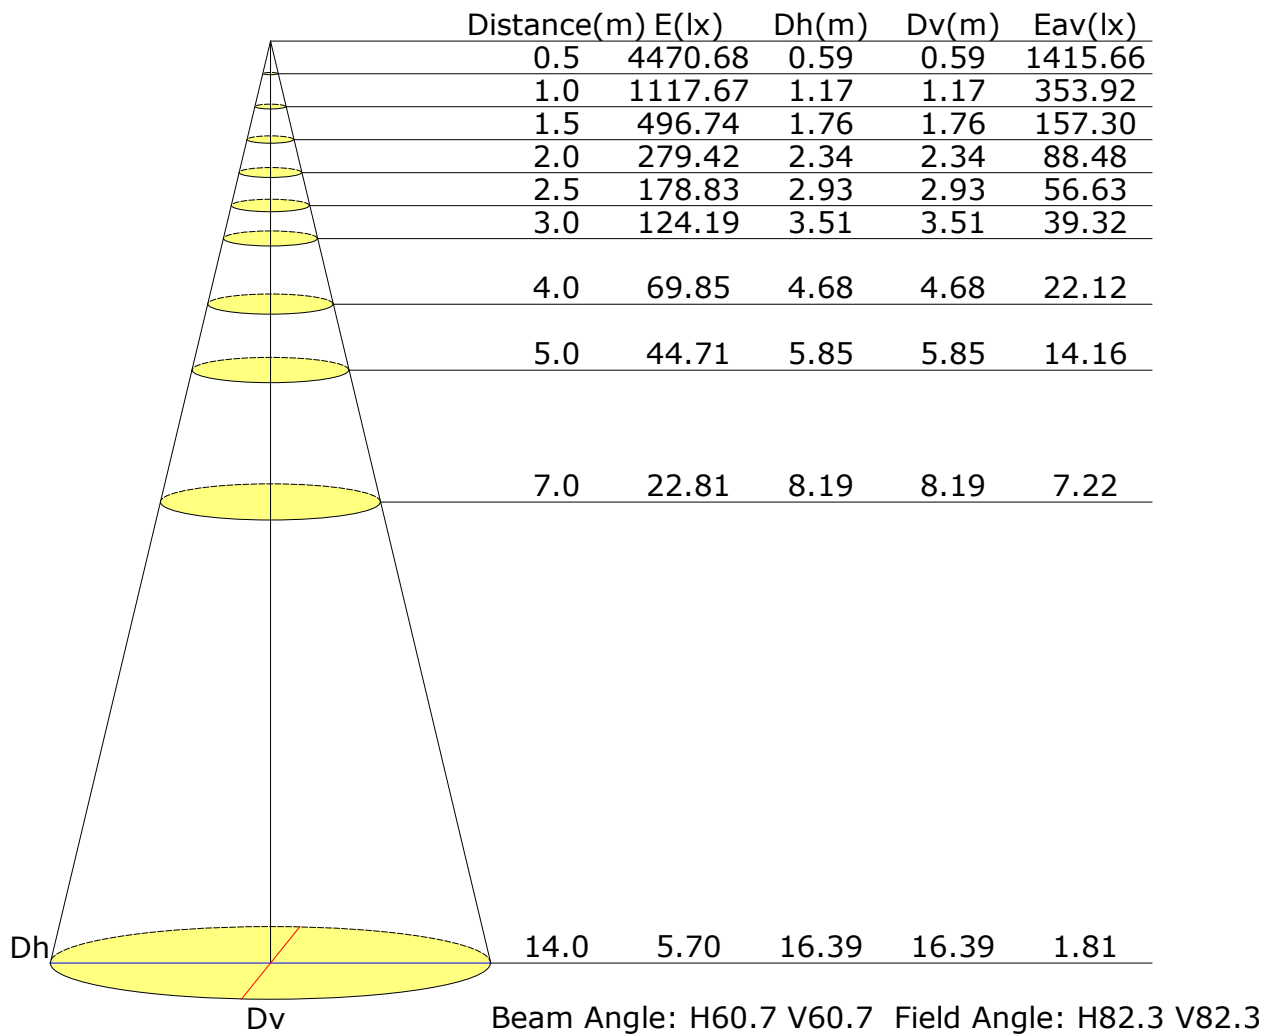

## Vertical IsoLux Plot

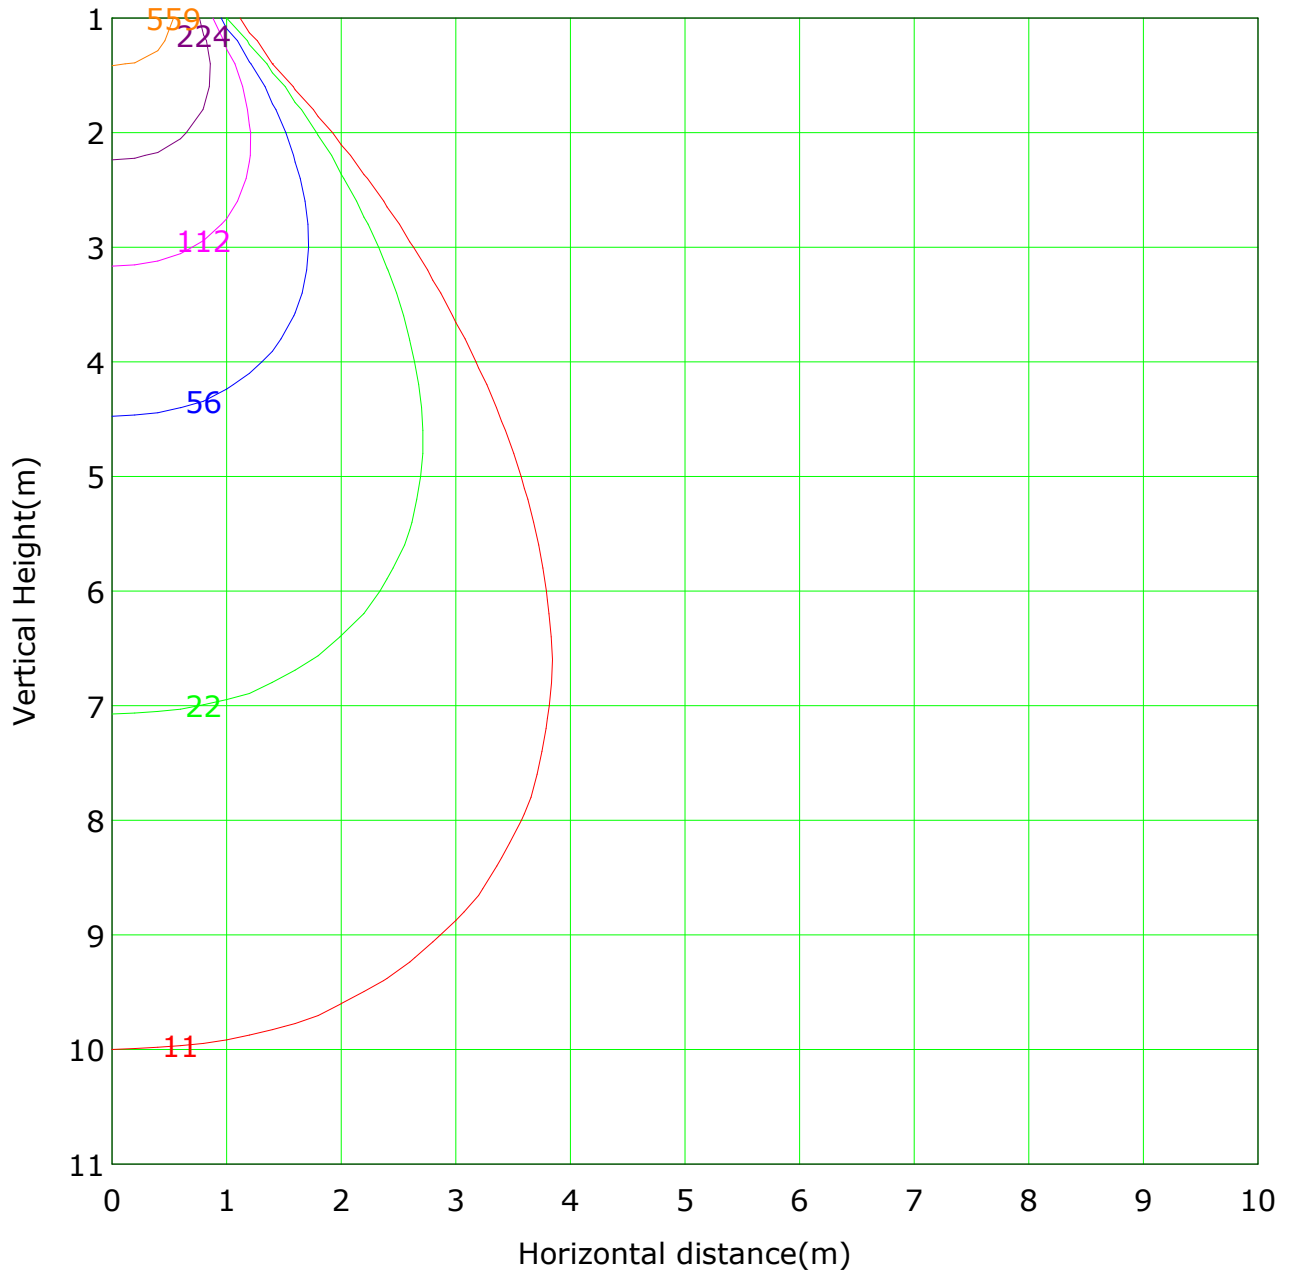


Lowest(m): 1m    Highest(m): 11    Max Lux: 1118

( 1%): 11 lx	( 2%): 22 lx
( 5%): 56 lx	( 10%): 112 lx
( 20%): 224 lx	( 50%): 559 lx
(100%): 1118 lx	

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## The average illuminance effective figure

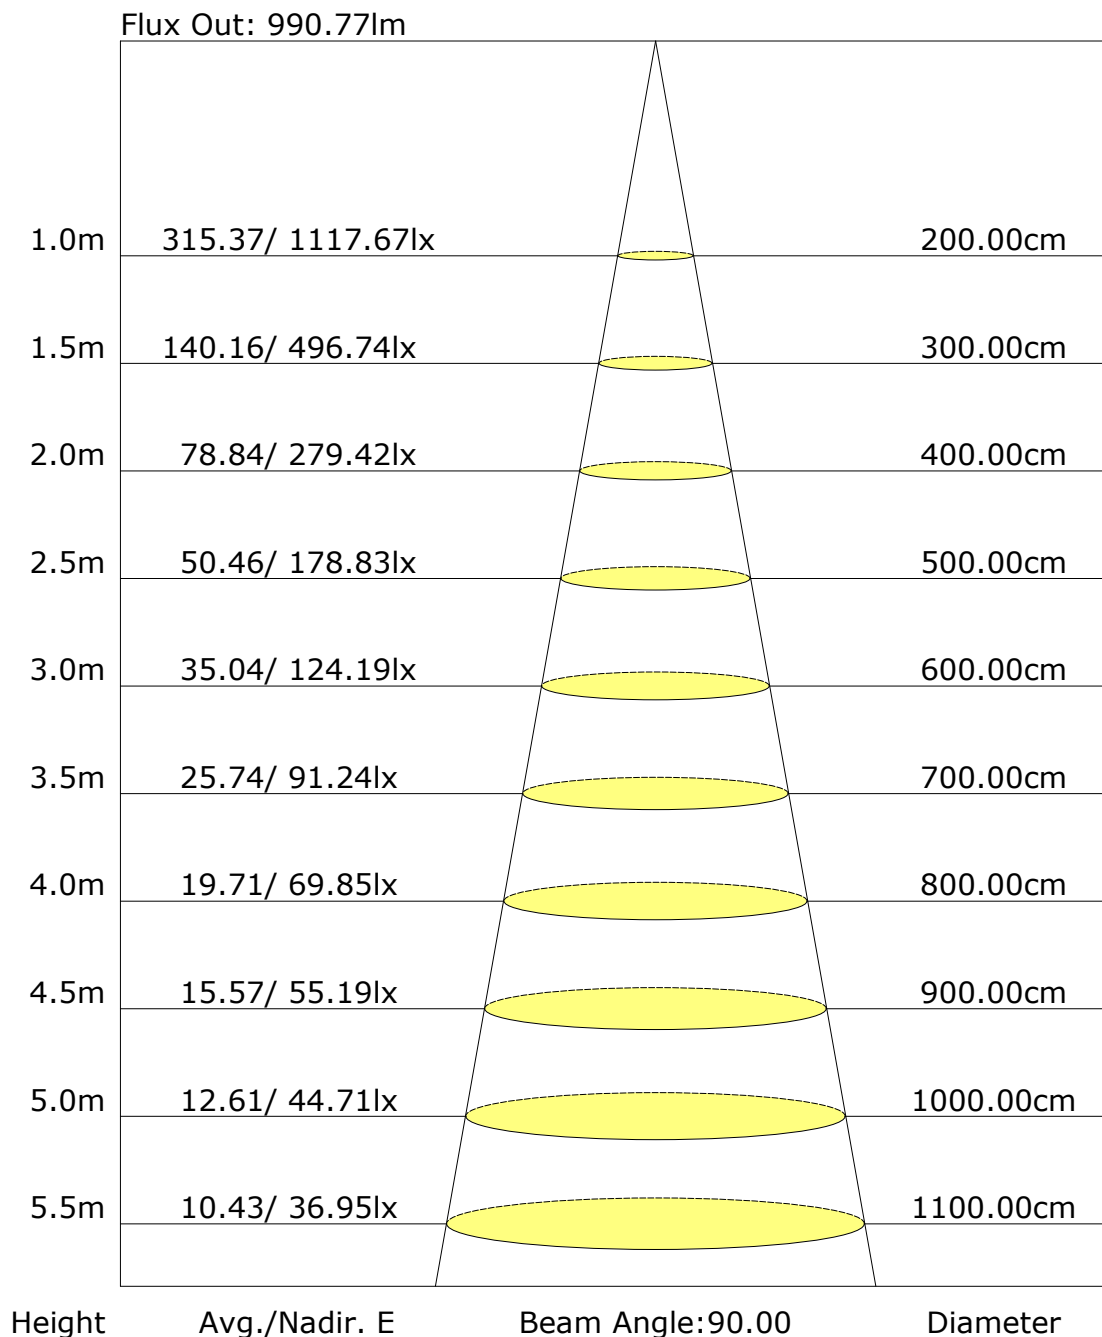

C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Zonal Lumen

[illegible]

Inspector:



## Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: