

Report No.: 91.06511 UTH Surface mounted Test Time: 2023-09-02 11:40

## Luminaire Property

Luminaire Category: Bridgelux V4HD 3000K CRI90

Voltage: 221.6 V

Current: 0.050 A

Power: 6.60 W

Power Factor: 0.588

## Photometric Results

CIE Class: Direct

Measurement Flux: 463.3 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H61.8

Vertical Diffuse Angle(50%): V61.8

Luminaire Efficacy Rating (LER): 70

Max. Intensity: 422.7 cd

Total Rated Lamp Lumens: 463.3 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 422.69 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

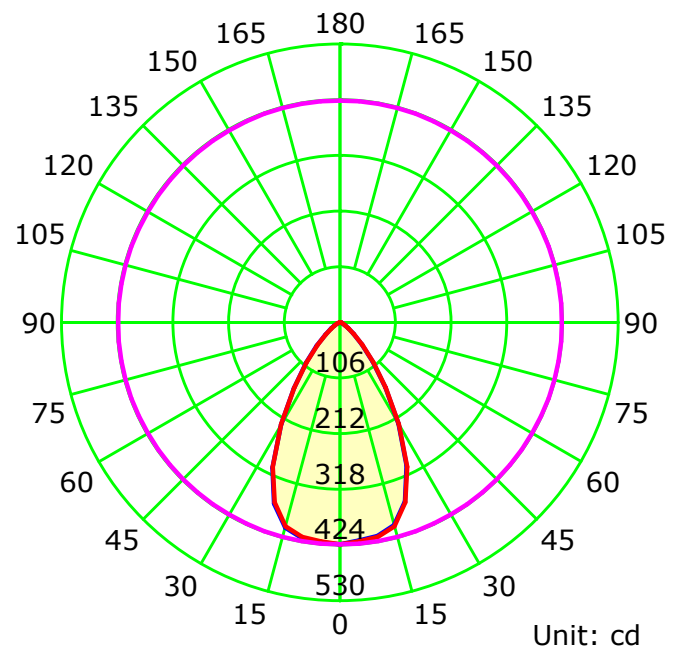

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

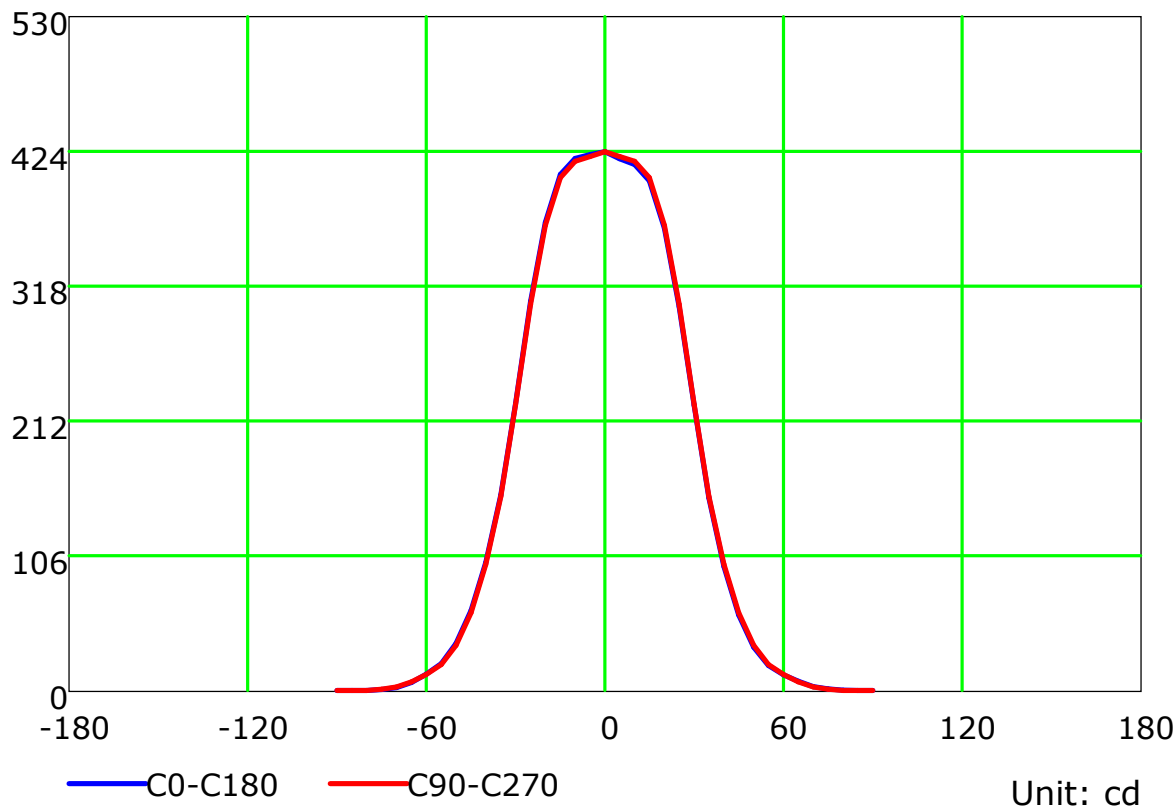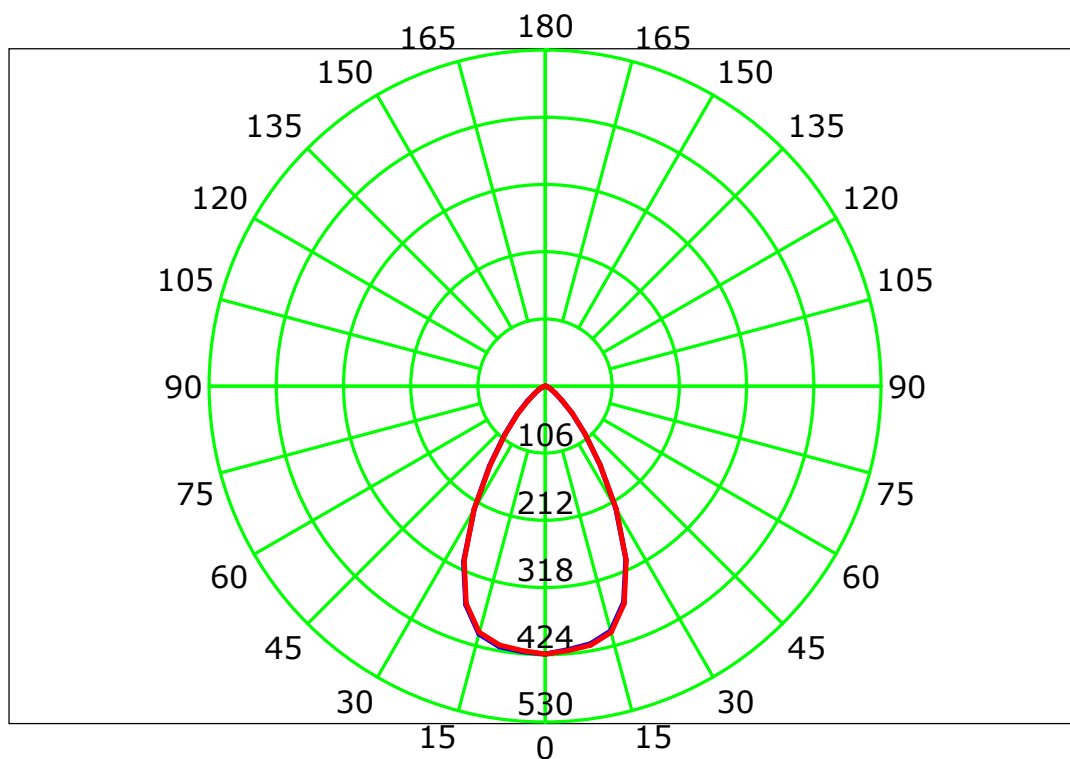

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

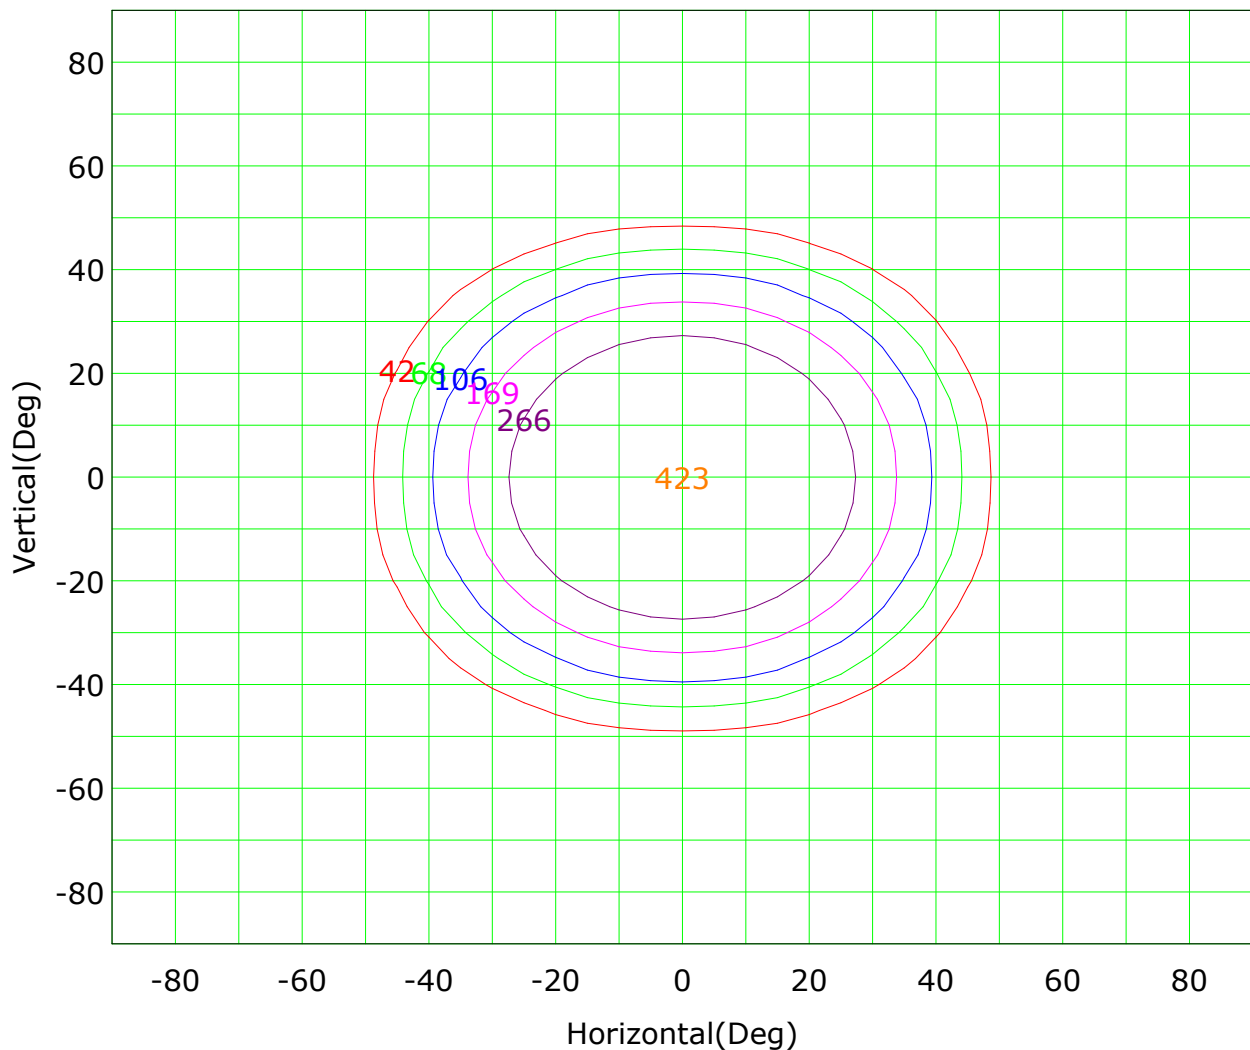

Imax (100%): 423 cd

( 10%):	42 cd	( 16%):	68 cd
( 25%):	106 cd	( 40%):	169 cd
( 63%):	266 cd	(100%):	423 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

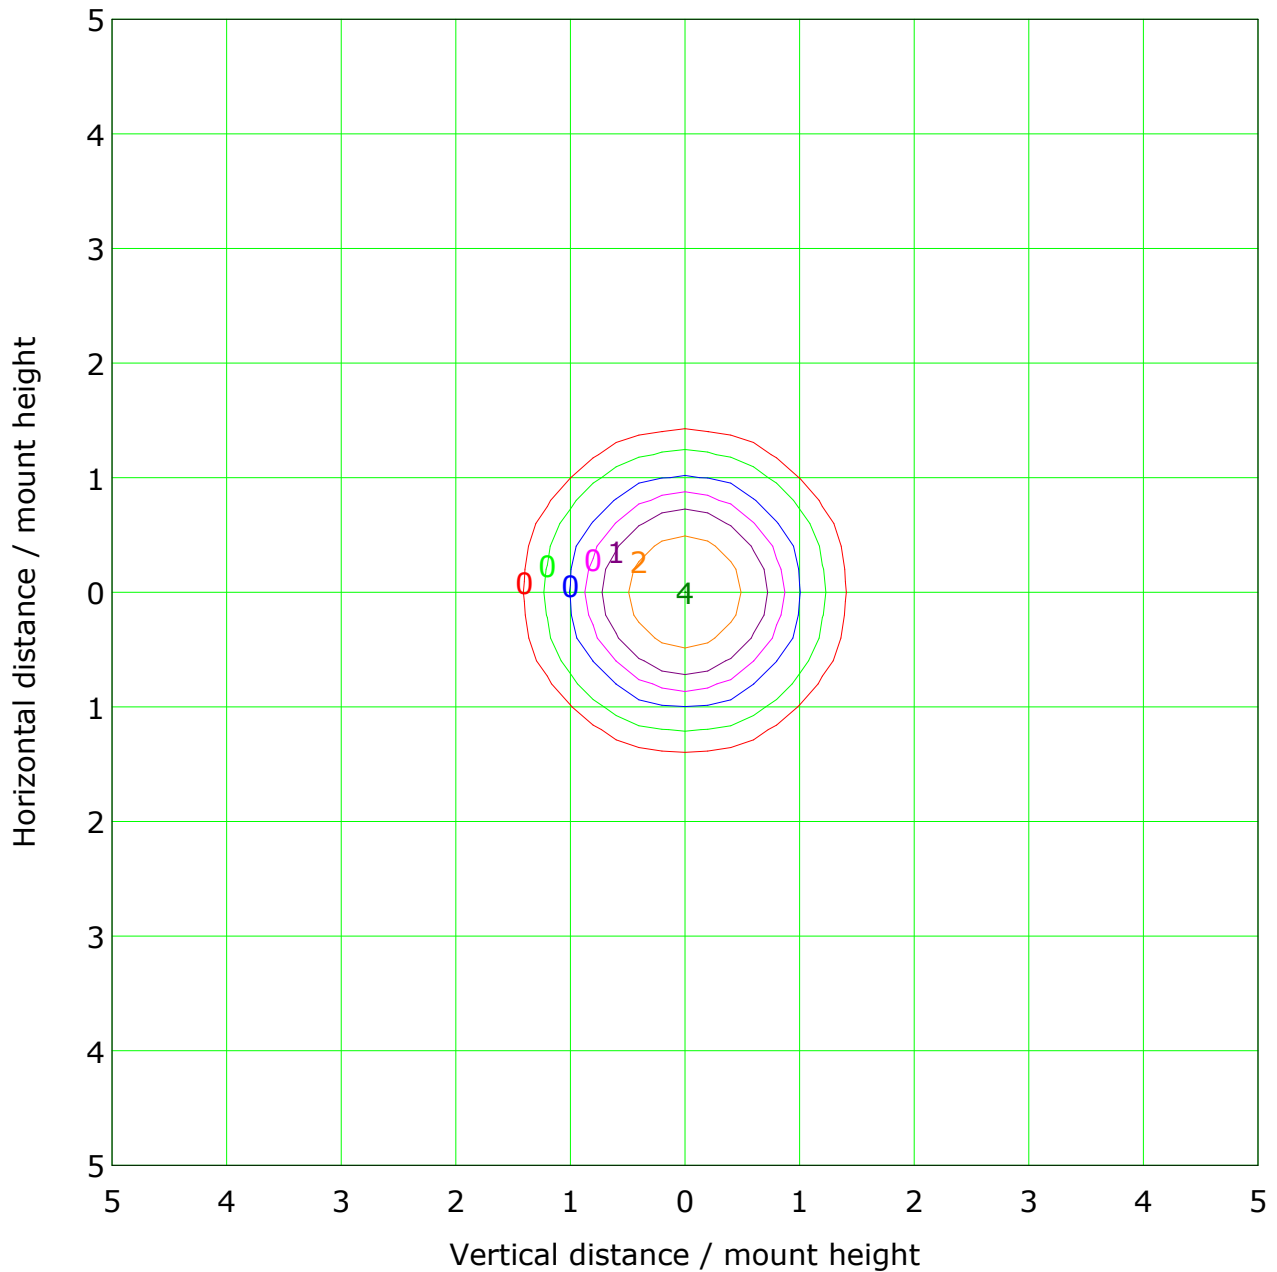


Mounting Height: 10m		Max Lux(100%): 4 lx	
( 1%):	0 lx	( 2%):	0 lx
( 5%):	0 lx	( 10%):	0 lx
( 20%):	1 lx	( 50%):	2 lx
(100%):	4 lx		

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Illuminance at a Distance

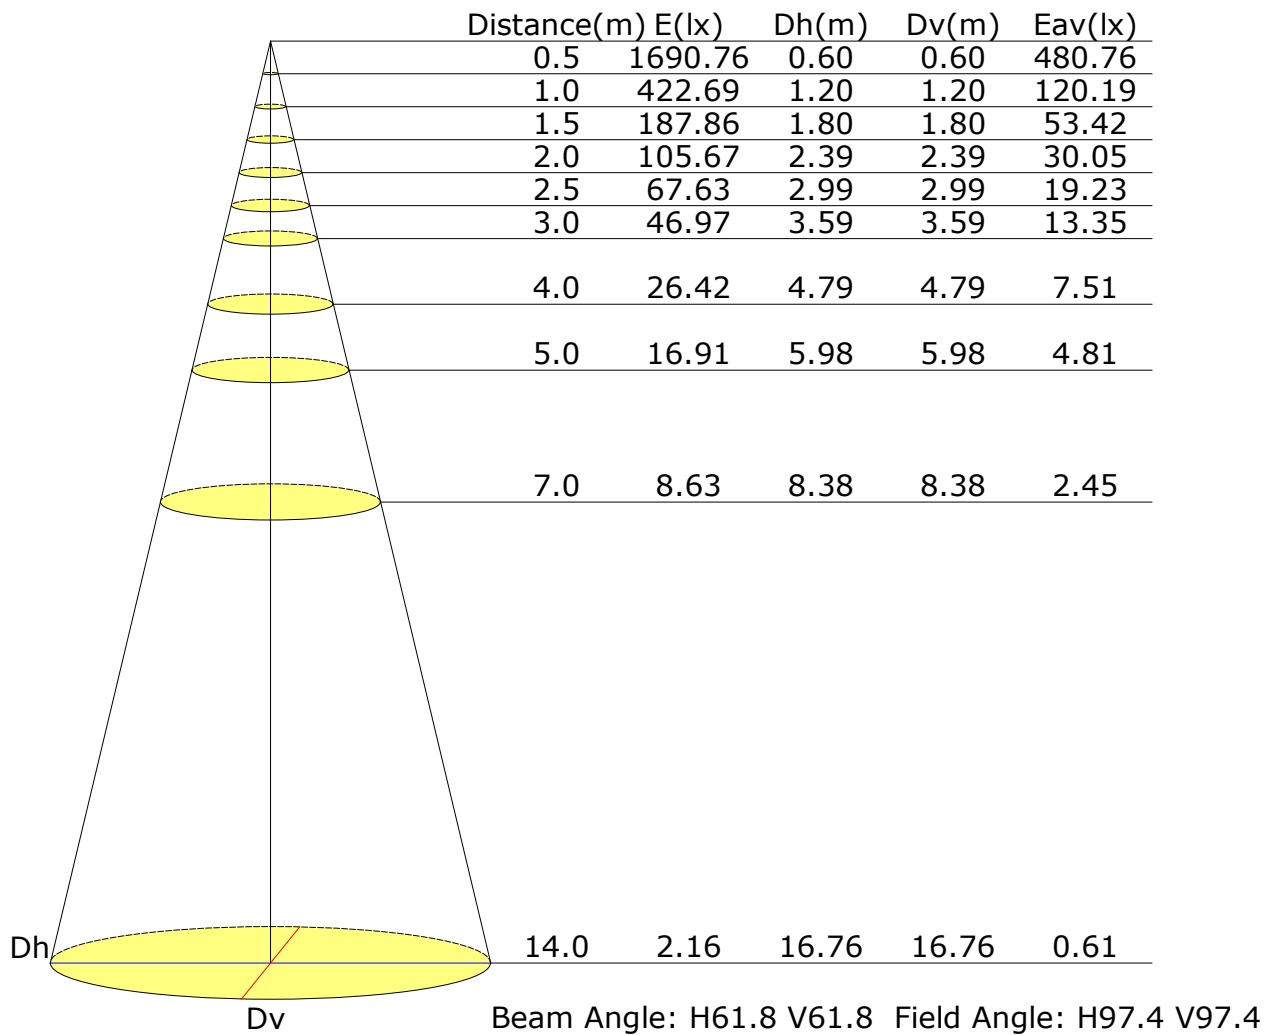

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## Vertical IsoLux Plot

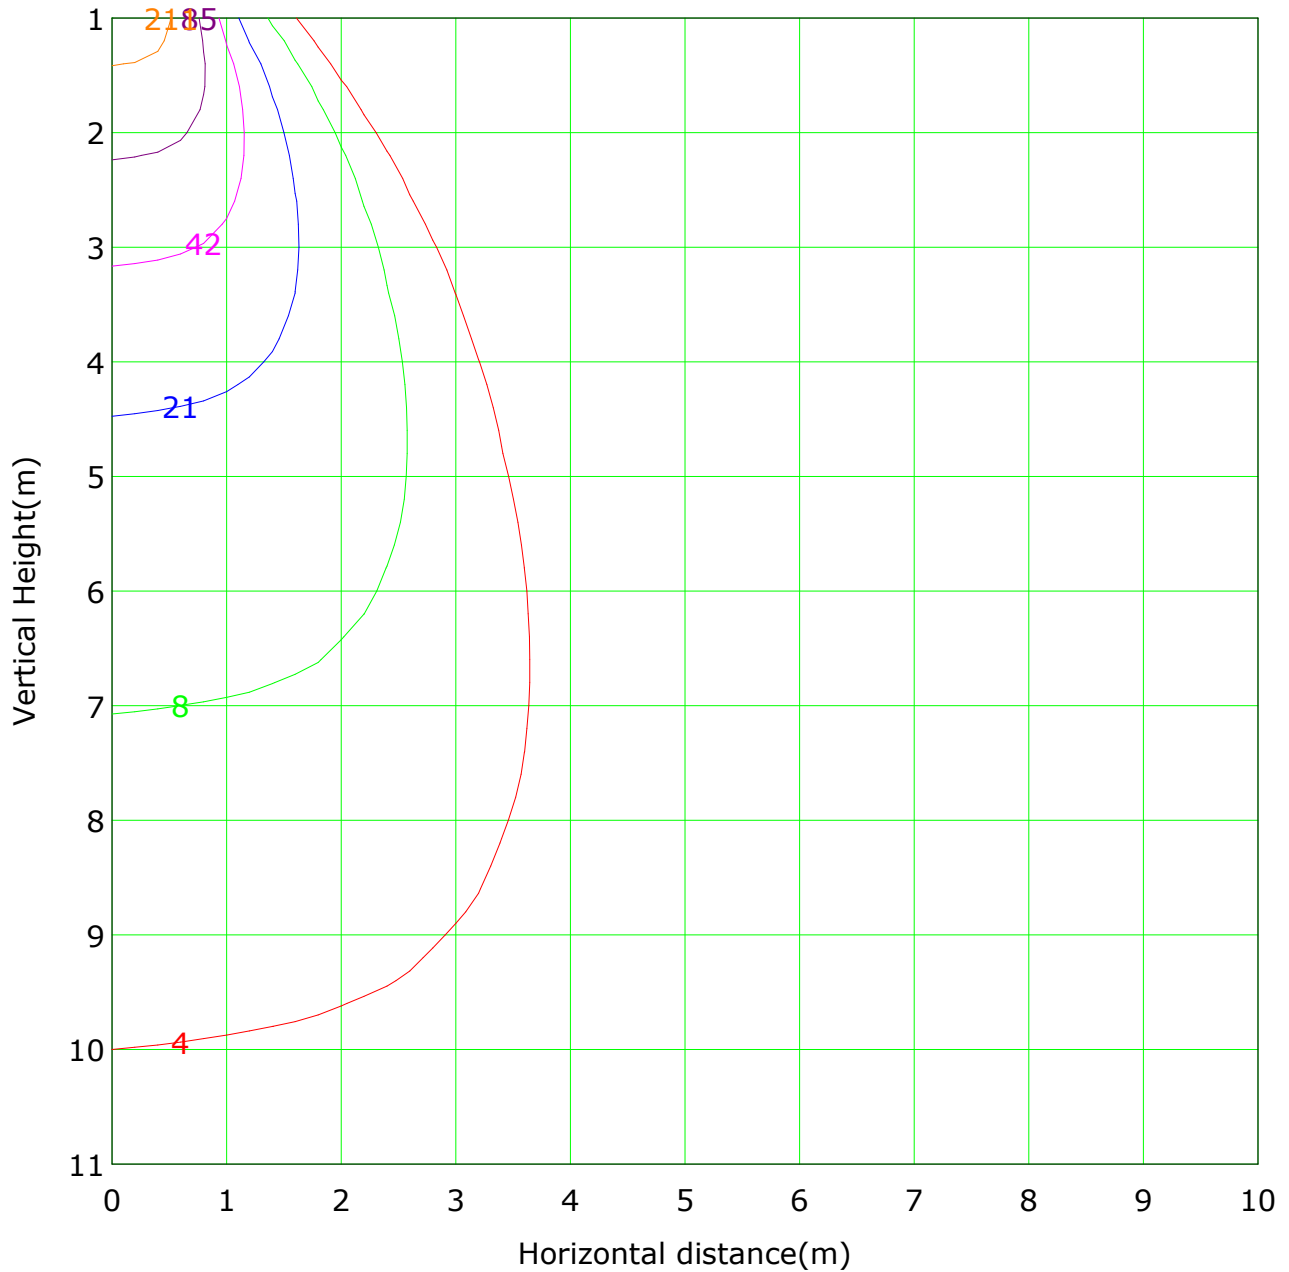


Lowest(m): 1m    Highest(m): 11    Max Lux: 423

( 1%): 4 lx	( 2%): 8 lx
( 5%): 21 lx	( 10%): 42 lx
( 20%): 85 lx	( 50%): 211 lx
(100%): 423 lx	

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## The average illuminance effective figure

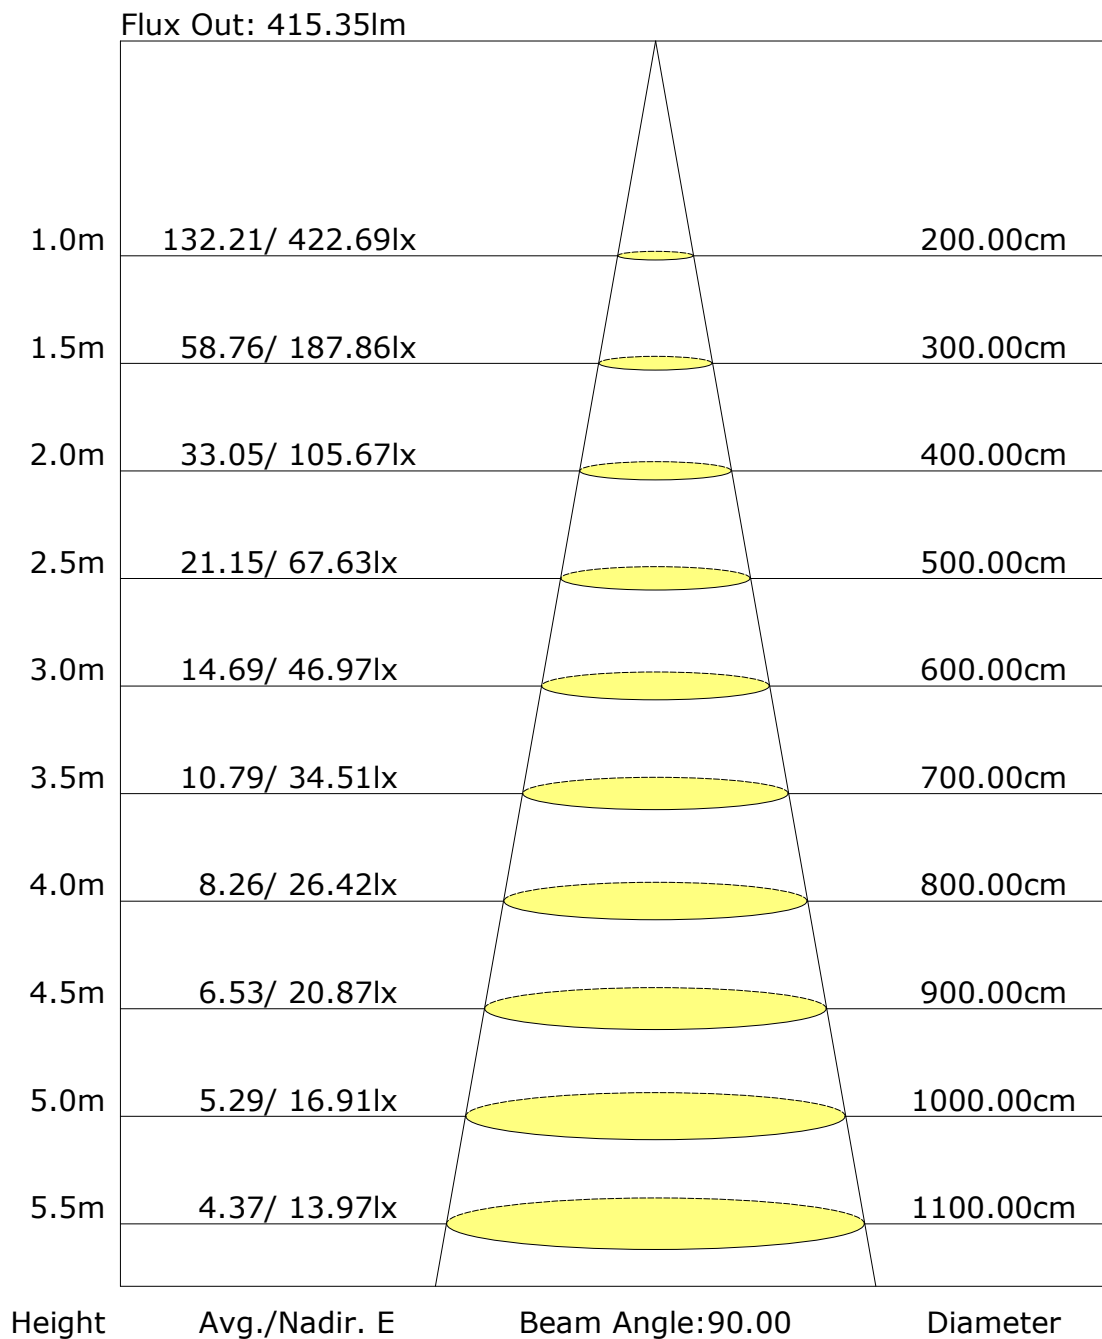

C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:



## Unit: cd

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector: