

Report No.: 92.10013 SQA Surfae Mounted Test Time: 2023-07-06 20:25

Luminaire Property

Luminaire Category: Citizen 1203 3000K CRI90

Luminaire Description: 19D

Current: 0.109 A

Power Factor: 0.602

Voltage: 218.6 V

Power: 14.40 W

Photometric Results

CIE Class: Direct

Measurement Flux: 1096.7 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H19.3

Vertical Diffuse Angle(50%): V19.3

Luminaire Efficacy Rating (LER): 76

Max. Intensity: 7097.23 cd

Total Rated Lamp Lumens: 1096.7 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 7097.22 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

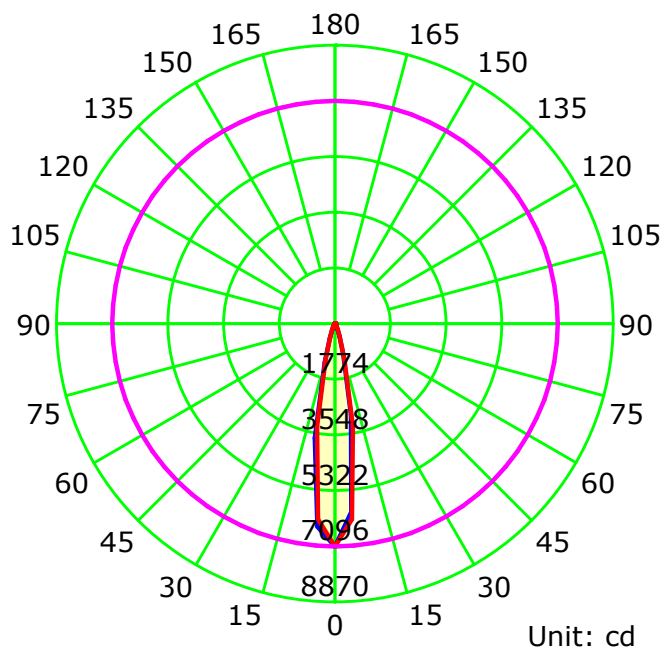

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

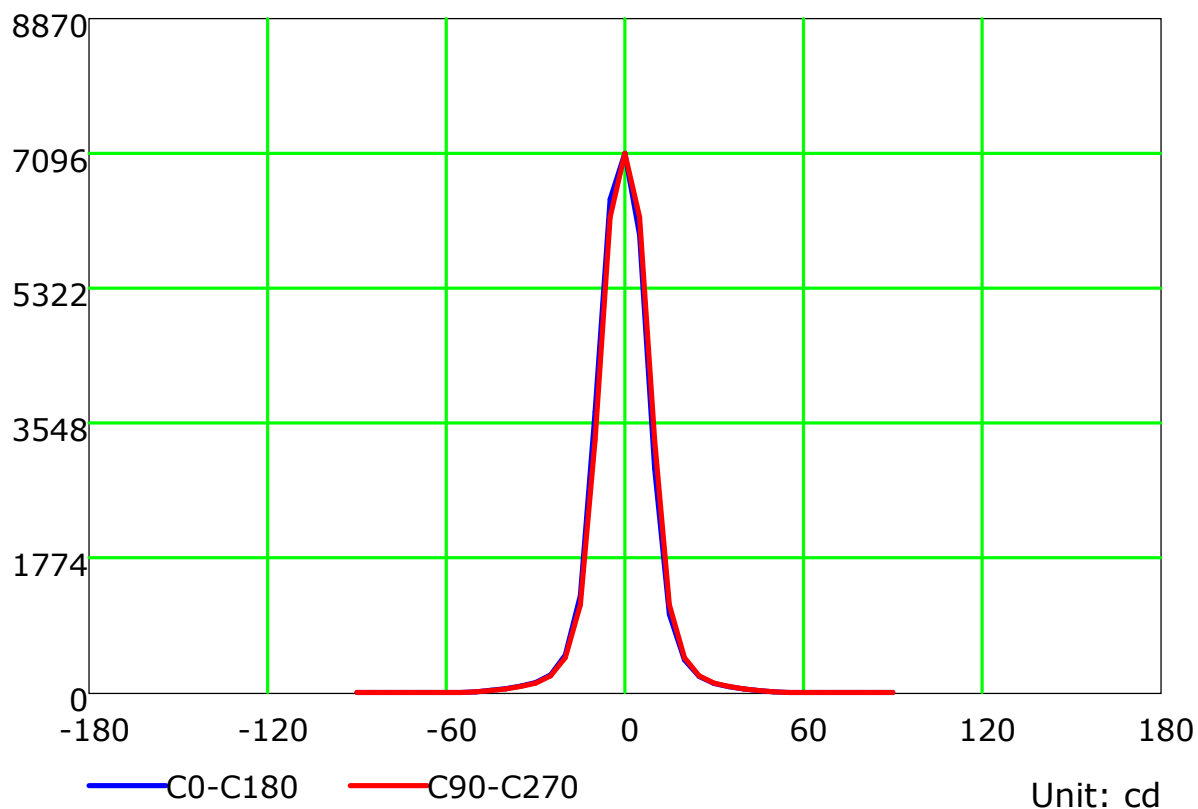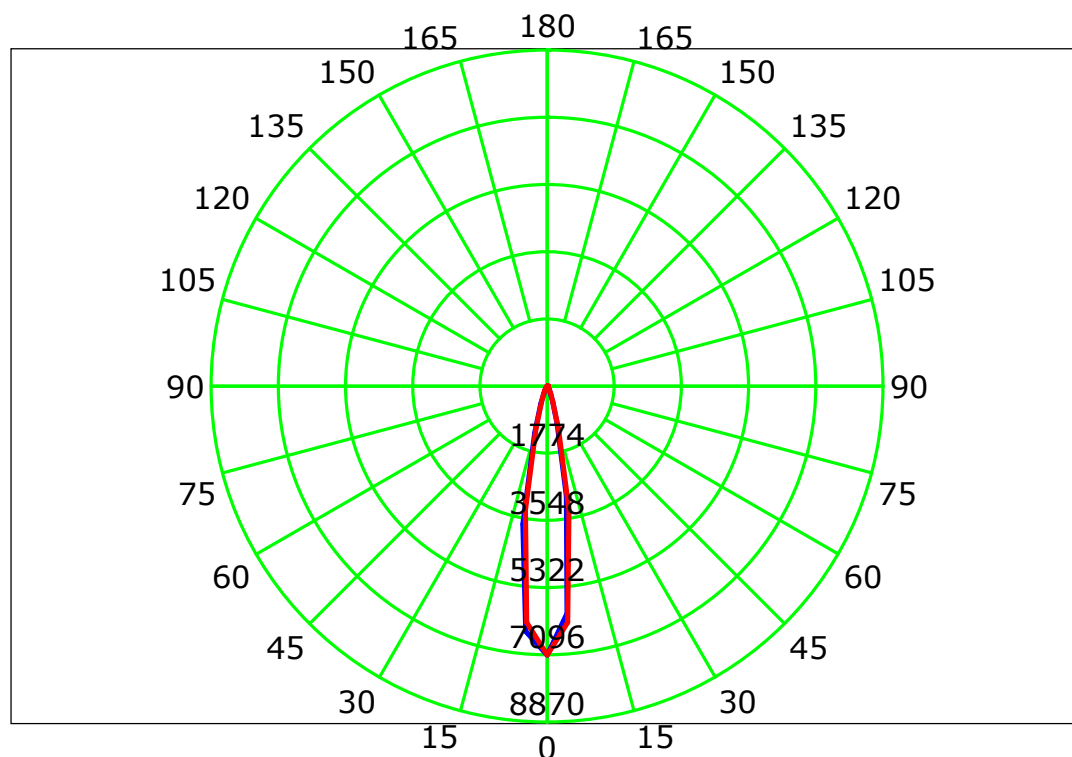

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

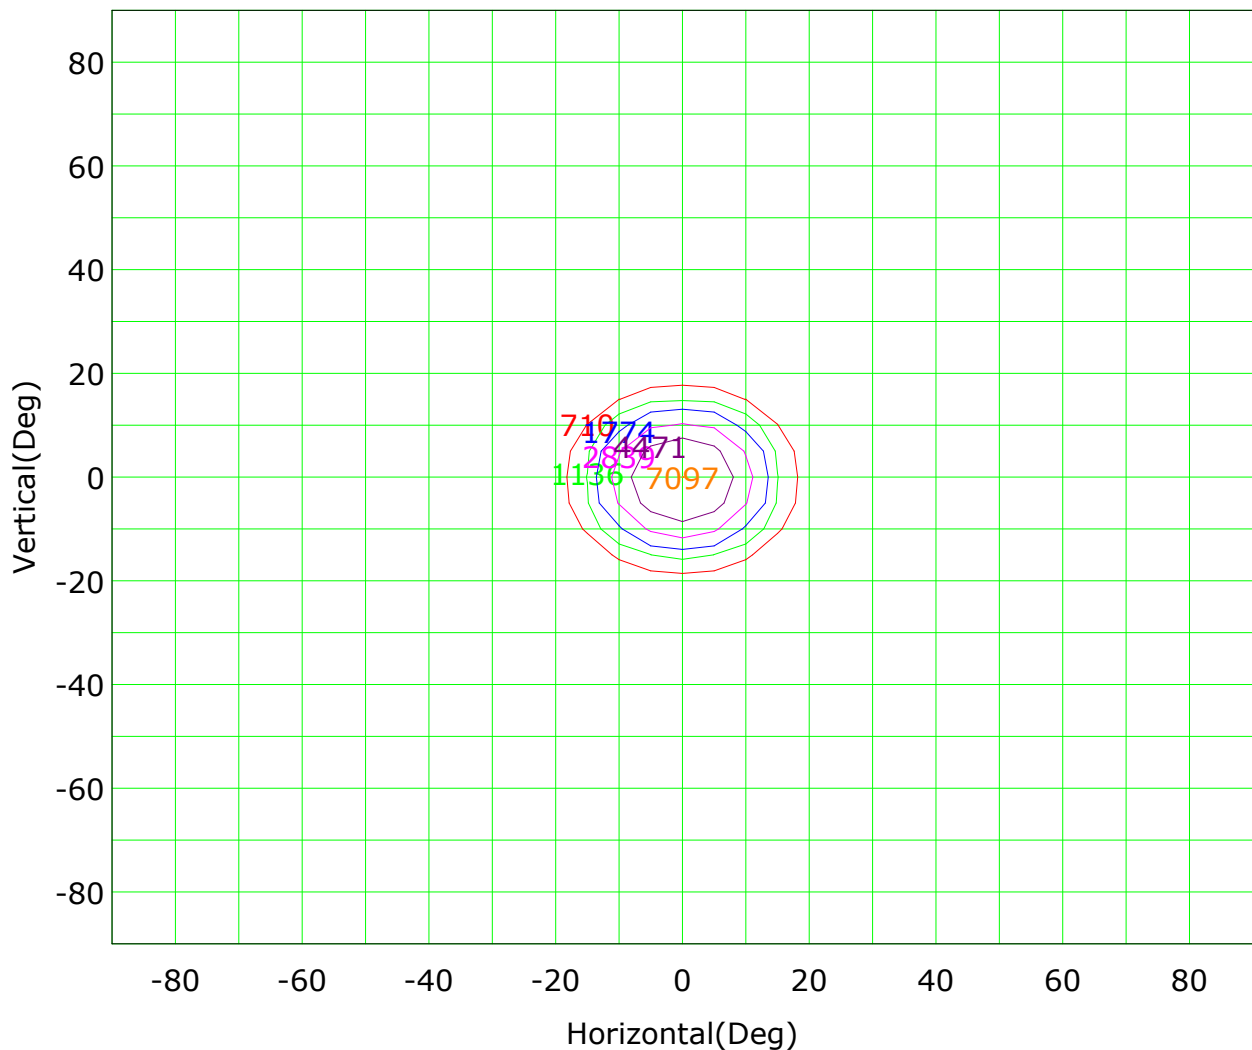

Imax (100%): 7097 cd

(10%): 710 cd	(16%): 1136 cd
(25%): 1774 cd	(40%): 2839 cd
(63%): 4471 cd	(100%): 7097 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

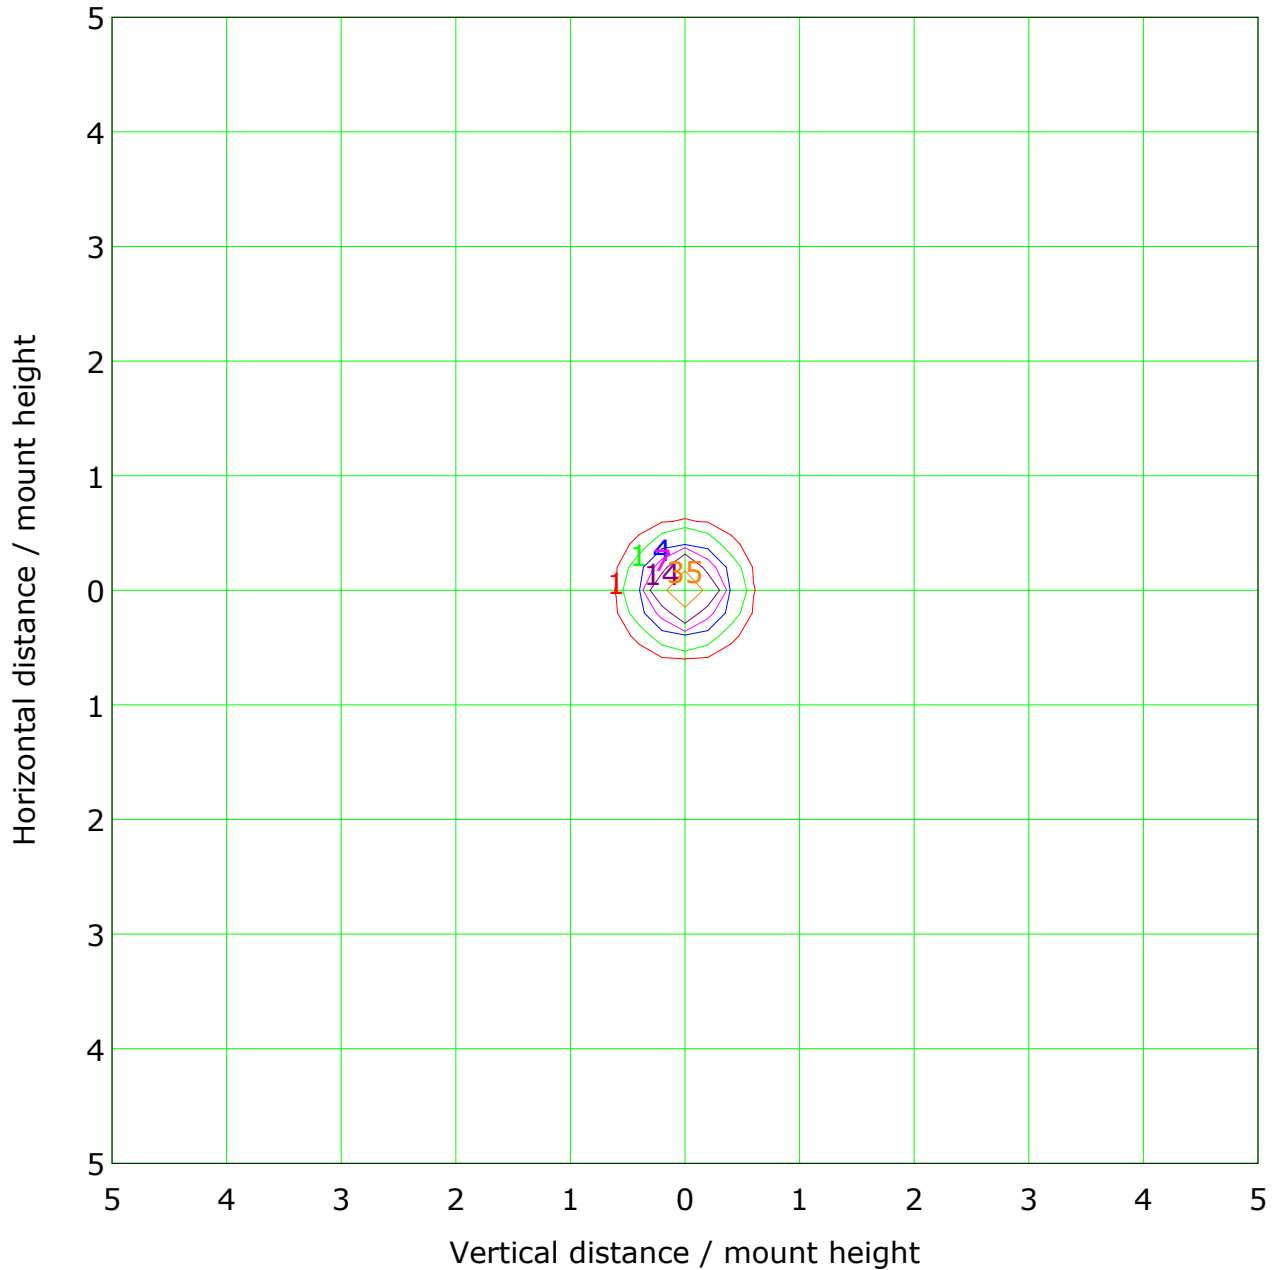


Mounting Height: 10m		Max Lux(100%): 71 lx	
(1%):	1 lx	(2%):	1 lx
(5%):	4 lx	(10%):	7 lx
(20%):	14 lx	(50%):	35 lx
(100%):	71 lx		


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Illuminance at a Distance

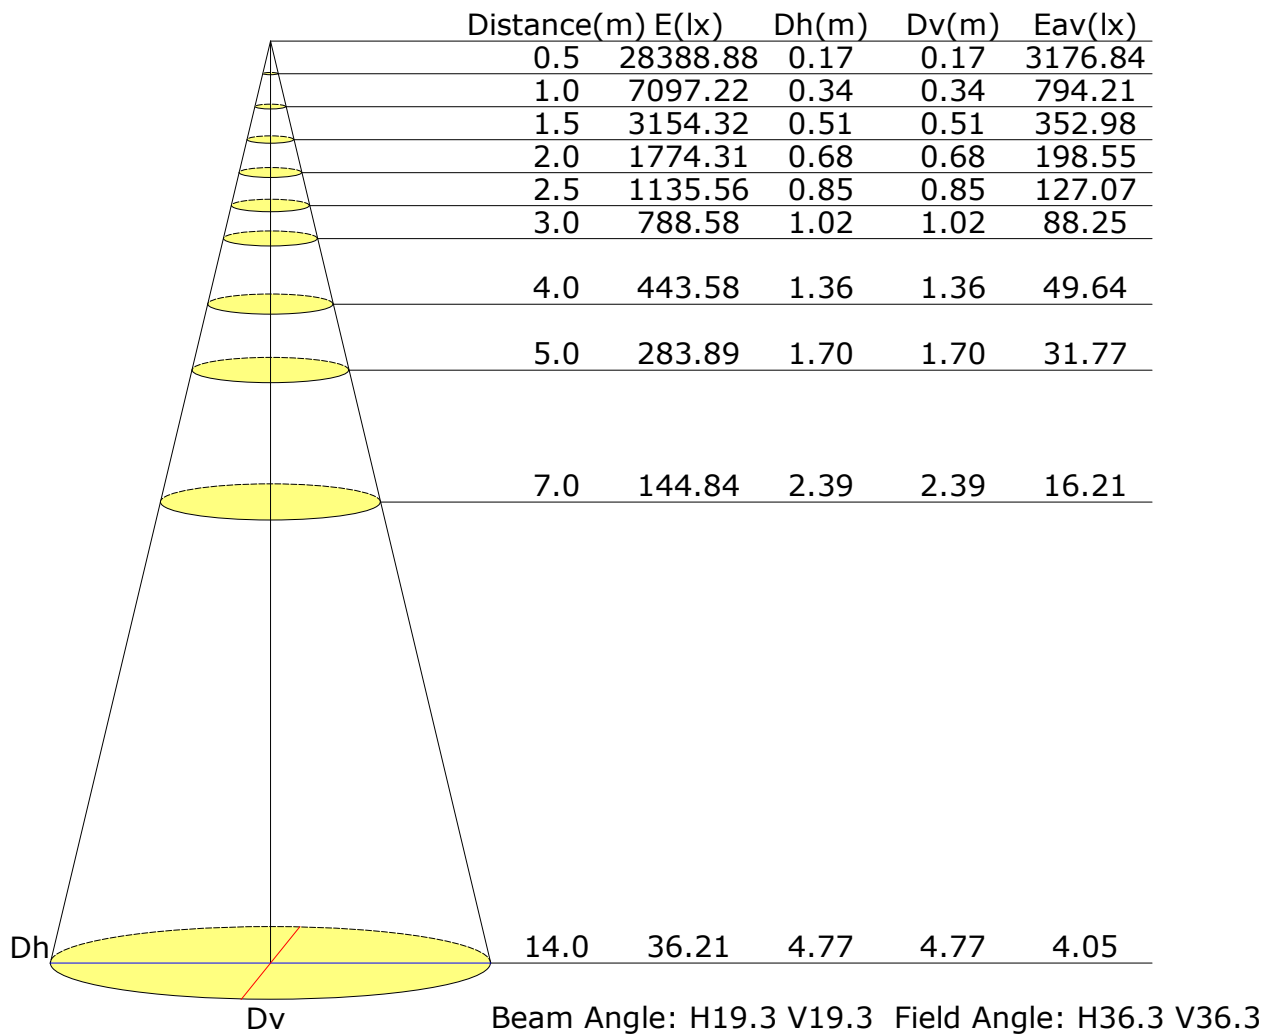

Vertical IsoLux Plot

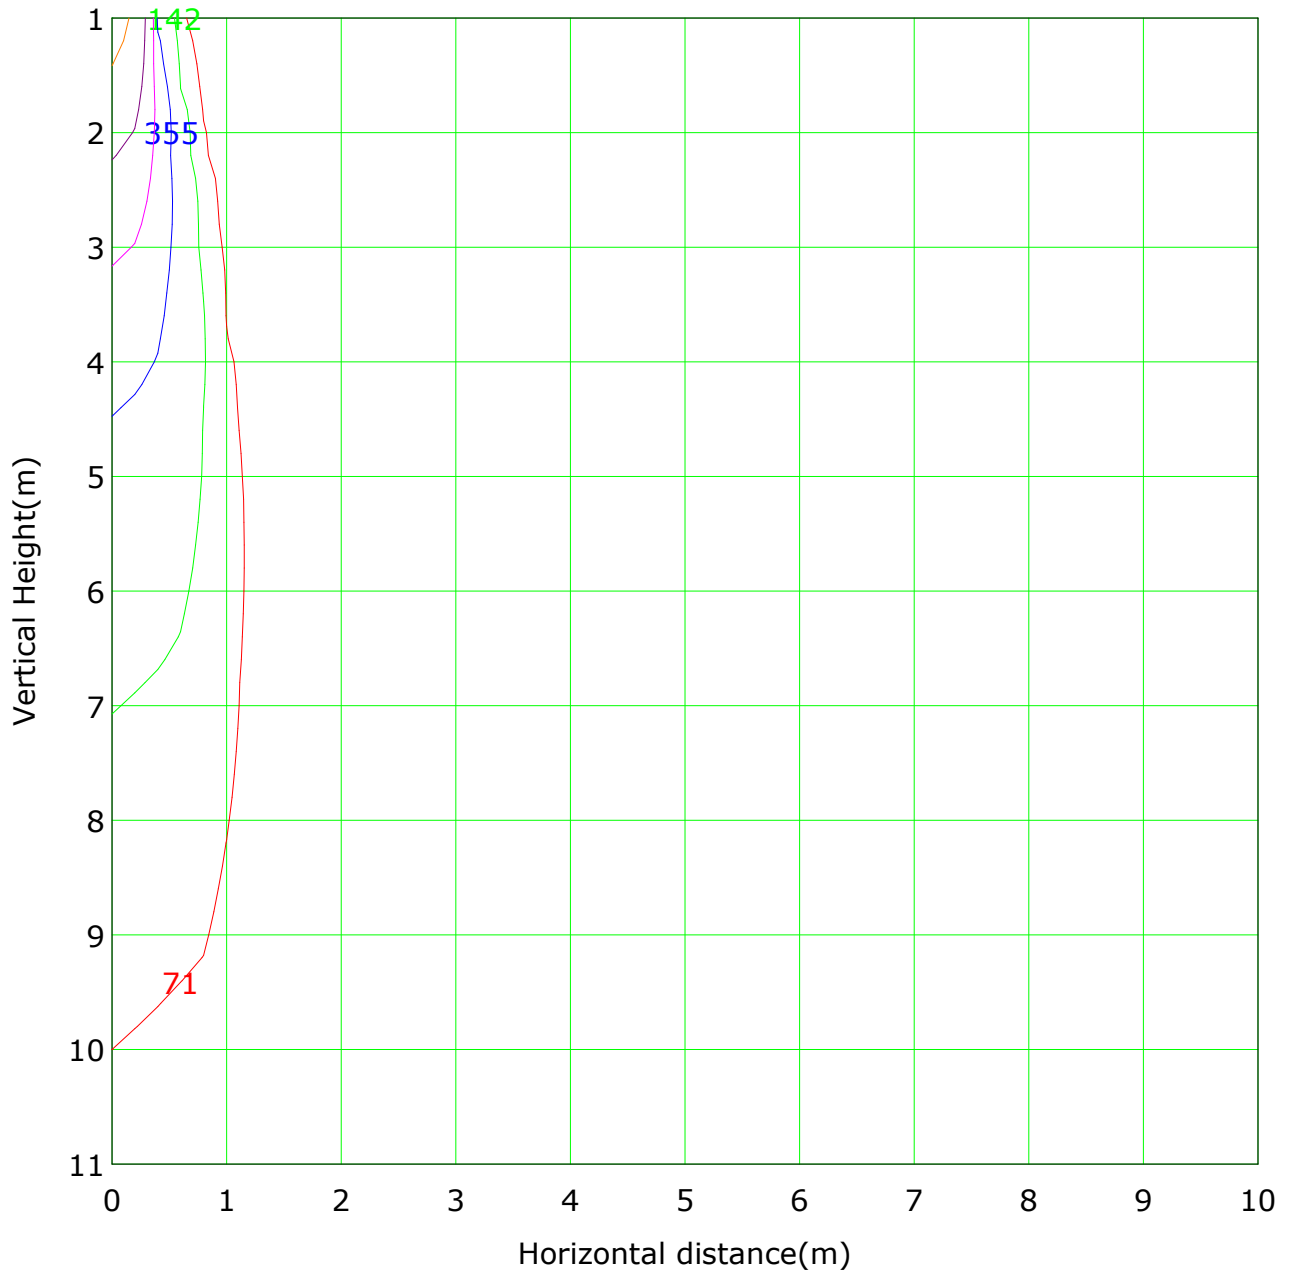


Lowest(m): 1m Highest(m): 11 Max Lux: 7097

(1%): 71 lx	(2%): 142 lx
(5%): 355 lx	(10%): 710 lx
(20%): 1419 lx	(50%): 3549 lx
(100%): 7097 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

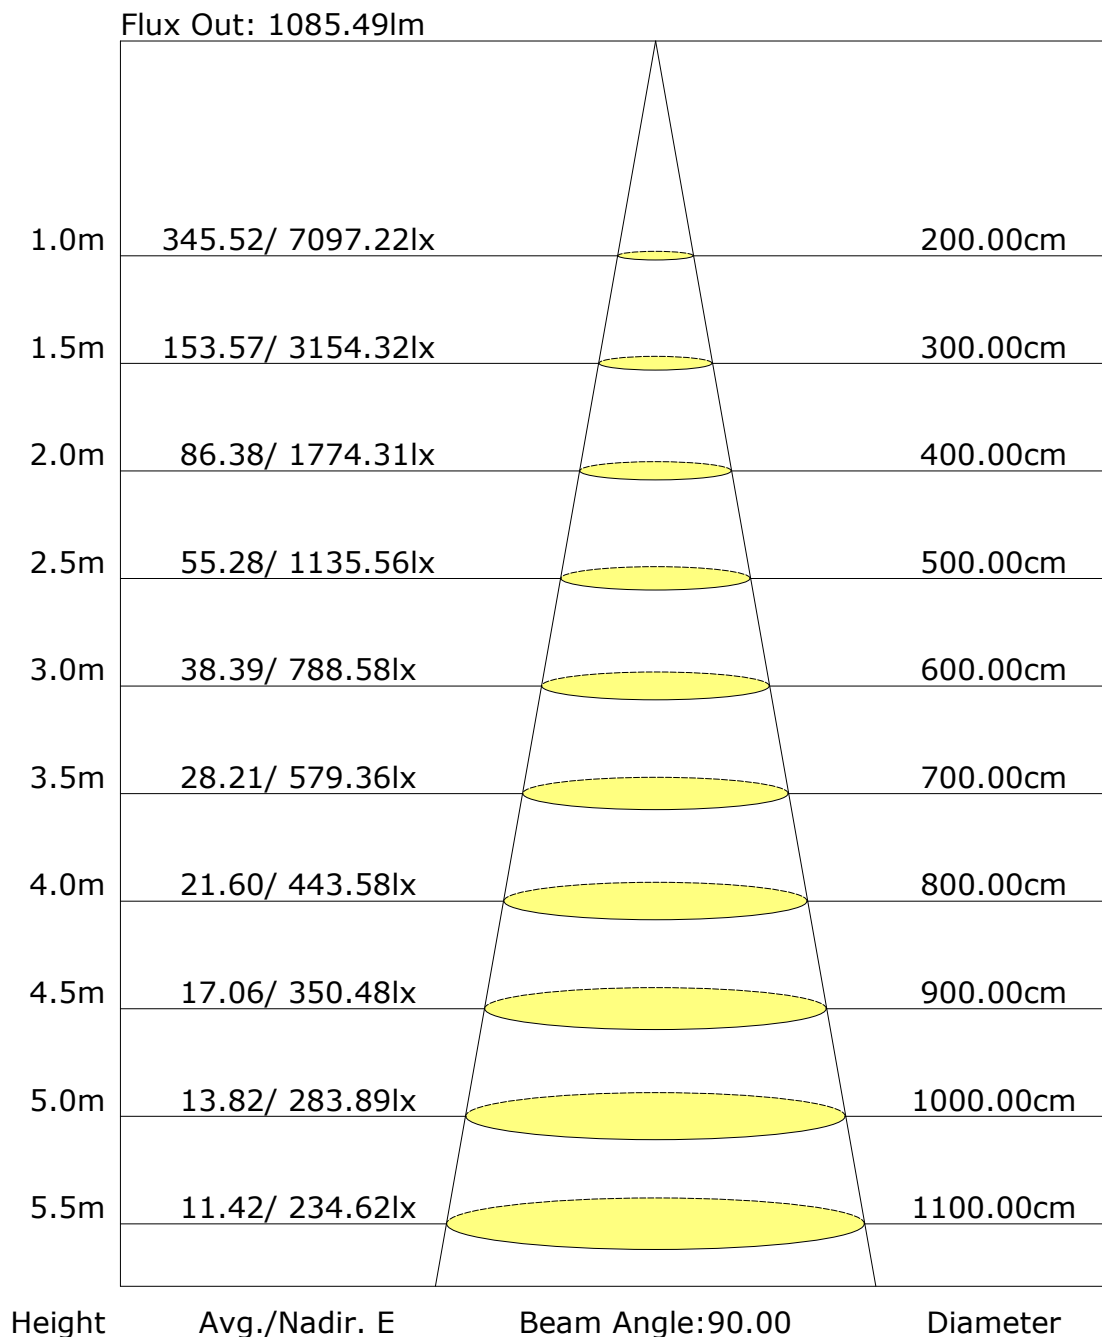

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Zonal Lumen

[illegible]

Inspector:

Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: